






















# GENERAL CATALOG



















# ICONS

The following symbols stand for the most important features and applications of Precisa scales and provide a fast overview of each product.

## FEATURES

- |  |  |
|--|--|
|  Swiss made                                       |  Swiss technology   |
|  Liquid crystal display                           |  RS232 interface for PC / printer                             |
|  Backlit LCD                                      |  USB device   |
|  Backlit graphic LCD                              |  Communication options (USB host, bluetooth, wireless etc.)   |
|  LC touch screen                                  |  Support IQ/OQ/PQ   |
|  Colour touch screen                              |  Anti-theft protection with password plus mechanical security |
|  Vacuum fluorescent display                       |  Direct tare and reference weight entry (manually)            |
|  Fully automatic built-in self calibration system |  Clock (printout GLP/GMP, auto-cal etc.)                      |
|  Automatic calibration warning                    |  Below balance weighing                                       |
|  External calibration                             |  Easy alphanumeric input                                      |
|  Internal calibration                            |  |

## APPLICATIONS

- |  |   |
|--|---|
|  Units g, mg, ozt, lb, tael, etc.                         |  Statistics  |
|  Percent weighing   |  Recorder  |
|  Piece counting   |  Minimum sample weight                                 |
|  Animal weighing  |  Automatic repeatability test                          |
|  Density determination                                    |  Multilevel backweighing                               |
|  Checkweighing  |  Dynamic difference weighing                           |
|  Net total application: Add up summation (Dosing program) |  Pipette calibration, optionally with evaporation trap |
|  Free conversion Area conversion (Paper program)          |  Buoyancy error suppression technology                 |

## RANGE OF PRECISA BALANCES AND SCALES

Models with\* are Dual Ranges  
 Models with \*\* are Floating Ranges  
 Models in *Italic*: Not EC type approved

- Balances PRECISA
- Scales PRECISA (Industrial)

## Readability

	0.01 mg SM	0.1 mg A	1 mg M	0.01 g C	0.1 g D	1 g G
100 g			BJ			
120 g		EP ES LT LX LS XB <sup>BB</sup>				
125 g	EP ES					
160 g			LT LS			
220 g		EP ES LT LX LS XB <sup>BB</sup> MI	BC			
225 g	EP* ES*					
320 g		EP ES LT LX LS	EP ES LT LX LS XB <sup>BB</sup>	LT LS		
410 g				BJ		
420 g		EP ES MI	EP** ES**			
520 g		EP ES				
610 g				BJ		
620 g			EP** ES** LT LX LS XB <sup>BB</sup>	EP** ES** LT LX LS		
920 g			EP ES LT LX LS			
1200 g				EP ES LT LX LS BJ		
1220 g			EP ES LT LX LS MI	EP** ES**		
2100 g					BJ	
2200 g				EP ES LT LX LS XB <sup>BB</sup> BJ		
2220 g			EP ES			
3200 g			LT LS XB <sup>BB</sup> BC	EP** ES** LT LX LS XB <sup>BB</sup>		
4100 g					BJ	
4200 g			EP ES LT LX LS XB <sup>BB</sup>			
6100 g					BJ	BJ
6200 g			EP ES LT LX LS XB <sup>BB</sup> MI	EP/EP** ES/ES** LT LX LS XB <sup>BB</sup>		
8100 g					BJ	
8200 g				EP ES	EP/EP* EP/ES*	
10200 g				LT LX LS		LT LX LS
12100 g					IBK	BJ
12200 g					EP ES	EP ES
18100 g					IBK	
20100 g						IBK
24100 g					IBK	
30100 g						IBK
34100 g					IBK	IBK*/IBK**
40100 g						IBK
60100 g						IBK

Capacity





## PRECISA DNA: ZERO TOLERANCE.

Laboratory and industrial technicians are aware of the significance of the results they provide. That is why they are unwilling to accept any compromise in their field of work. And that is precisely why leading specialists around the world place their trust in Precisa. And have done for decades.

## PRECISA DNA: SWISS PRECISION.

Precisa products are prime examples of Swiss perfection and reliability. They are tried and tested in both demanding laboratory environments and industrial applications, and are subject to rigorous quality controls throughout the entire manufacturing process. Precisa invests continuously in developing new technologies and employs a highly qualified team. The result is a state-of-the-art range of precision instruments for the most exacting demands.



Semi-micro Balances



Analytical Balances



Precision Balances



Standard Balances



Moisture Analyzers



Automatic Moisture & Ash Analyzers



Industrial Scales



Special Products

# SEMI-MICRO BALANCES 0.01 mg




## SERIES 360 EP



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
EP 125SM	125 g	0.01 mg	0.02 mg ≤ 40 g 0.05 mg > 40 g	0.03 mg	Ø 80	1 / 1 mg	8 s	360-9100-001
EP 225SM-DR	102 g / 225 g	0.01 mg / 0.1 mg	0.02 mg ≤ 40 g 0.05 mg > 40 g	0.03 / 0.1 mg	Ø 80	1 / 1 mg	8 s / 3 s	360-9101-001



## SERIES 360 ES



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
ES 125SM	125 g	0.01 mg	0.02 mg ≤ 40 g 0.05 mg > 40 g	0.03 mg	Ø 80	1 / 1 mg	8 s	360-9102-001
ES 225SM-DR	102 g / 225 g	0.01 mg / 0.1 mg	0.02 mg ≤ 40 g 0.05 mg > 40 g	0.03 / 0.1 mg	Ø 80	1 / 1 mg	8 s / 3 s	360-9103-001

# SEMI-MICRO BALANCES 0.01 mg



360 EP: Sensor-controlled automatic draft shield; offers convenient hands-free operation on both sides



360 ES: Sophisticatedly designed draft shield; provides optimum draft suppression inside the weighing chamber

Options	360 EP	360 ES
Prepared for verification according to EC/OIML by Precisa (not verified!), available for balances with EC(OIML) type approval and SCS only	350-8671	350-8671
Initially verified according to 2009/23/ECC by Precisa, available for balances with EC(OIML) type approval and SCS only	350-8679	350-8679
SCS (self calibration system) with clock, automatic on temperature change and real-time programmable	standard	standard

Accessories	360 EP	360 ES
Draft shield 360 automatic, height 26mm	standard	350-8657
Draft shield 360 manual, height 260 mm	350-8659	standard
Podest for draft shield 360	350-8678	350-8678
Draft shield 320 XB, height 260mm	350-8519	350-8519
Hook for weighing below the balance	350-8527	350-8527
Cable for balance 360 used as reference balance	350-8661	350-8661
Desk power adapter with EU plug, 80V - 240V, for balances with IP65 (protection against ingress of dust and low pressure water jets)	350-8372	350-8372
Density kit, for 0.01mg and 0.1mg balances, container size: $\emptyset = 75\text{mm}$ , $h = 100\text{mm}$	350-8636	350-8636
Density kit solids only (without glass body and hook), for 0.01mg and 0.1mg balances, container size: $\emptyset = 75\text{mm}$ , $h = 100\text{mm}$	350-8637	350-8637
Glass body for density determination of liquids, $V = 10\text{cm}^3$	350-7054	350-7054
Downholder for samples with $\rho < 1\text{g/cm}^3$	350-7194	350-7194
Evaporation trap for pipette calibration, for 0.01mg and 0.1mg balances	350-8633	350-8633
Adapter for Eppendorf evaporation trap, for 0.01mg and 0.1mg balances	350-8634	350-8634
Dust cover for the whole balance, set of 20 pieces	350-8676	350-8676

Slide-in Modules	360 EP	360 ES
PrecisaBUS converter, enables connection to almost all PrecisaBUS accessories	—	350-8664
USB host	350-8665	—
Ethernet wired	350-8666	—
Ethernet wireless	350-8667	—
Bluetooth	350-8668	—
PS/2 f & RS232 DB9 f	350-8670	—

## Additional Accessories & Applications

- PrecisaBUS accessories, see Special Products on page 24/25
- SmartBox® applications, see Special Products on page 24/25
- Further accessories, see Special Products on page 24/25

# ANALYTICAL BALANCES 0.1 mg




## SERIES 360 EP



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
EP 120A	120 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg	2 s	360-9231-001
EP 220A	220 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg	2 s	360-9232-001
EP 320A	320 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg	3 s	360-9233-001
EP 420A	420 g	0.1 mg	0.15 mg	0.4 mg	Ø 90	1 / 1 mg	3 s	360-9234-001
EP 520A	520 g	0.1 mg	0.15 mg	0.4 mg	Ø 90	—	4 s	360-9236-001
EP 420A-FR	120 g - 420 g	0.1 mg / 1 mg	0.15 / 1 mg	0.3 / 1 mg	Ø 90	1 / 1 mg	3 s	360-9235-001




## SERIES 360 ES



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
ES 120A	120 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg	2 s	360-9237-001
ES 220A	220 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg	2 s	360-9238-001
ES 320A	320 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg	3 s	360-9239-001
ES 420A	420 g	0.1 mg	0.15 mg	0.4 mg	Ø 90	1 / 1 mg	3 s	360-9240-001
ES 520A	520 g	0.1 mg	0.15 mg	0.4 mg	Ø 90	—	4 s	360-9242-001
ES 420A-FR	120 g - 420 g	0.1 mg / 1 mg	0.15 / 1 mg	0.3 / 1 mg	Ø 90	1 / 1 mg	3 s	360-9241-001




## SERIES 321 LT



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
LT 120A	120 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg	2 s	321-9252-001
LT 220A	220 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg	2 s	321-9253-001
LT 320A	320 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg	3 s	321-9254-001



## SERIES 321 LX



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
LX 120A	120 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg*	2 s	321-9246-002
LX 220A	220 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg*	2 s	321-9247-002
LX 320A	320 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg*	3 s	321-9248-002

\*Prepared for verification or initially verified with SCS (-001) only



## SERIES 321 LS



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
LS 120A	120 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg*	2 s	321-9249-002
LS 220A	220 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg*	2 s	321-9250-002
LS 320A	320 g	0.1 mg	0.1 mg	0.2 mg	Ø 90	1 / 1 mg*	3 s	321-9251-002

\*Prepared for verification or initially verified with SCS (-001) only

# ANALYTICAL BALANCES 0.1 mg



360 EP: Sensor-controlled automatic draft shield; offers convenient hands-free operation on both sides



360 ES: Sophisticatedly designed draft shield; provides optimum draft suppression inside the weighing chamber



321 LX: Ergonomically designed draft shield; provides optimal user control



320 XB: Well-trieed all-round basic draft shield

Options	360 EP	360 ES	321 LX	321 LT/LS
Prepared for verification according to EC/OIML by Precisa (not verified!), available for balances with EC/OIML type approval and SCS only	350-8671	350-8671	350-8684	350-8684
Initially verified according to 2009/23/ECC by Precisa, available for balances with EC/OIML type approval and SCS only	350-8679	350-8679	350-8685	350-8685
SCS (self calibration system), built-in, with clock, automatic on temperature change and real-time programmable	standard	standard	321-xxxx-001	LT: standard LS: 321-xxxx-001

Accessories	360 EP	360 ES	321 LX	321 LT/LS
Draft shield 360 automatic, height 260mm	standard	350-8657	—	—
Draft shield 360 manual, height 260mm	350-8659	standard	—	—
Podest for draft shield 360	350-8678	350-8678	—	—
Draft shield 320 XB, height 260mm	350-8519	350-8519	350-8519	standard
Pedal for tare or print function	—	—	350-8814	350-8814
Hook for weighing below the balance	350-8527	350-8527	350-8527	350-8527
Cable for balance 360 or 321 used as reference balance	350-8661	350-8661	350-8661	350-8661
Desk power adapter with EU plug, 80V - 240V, for balances with IP65 (protection against ingress of dust and low pressure water jets)	350-8372	350-8372	350-8372	350-8372
Density kit for 0.01mg and 0.1mg balances, container size: $\varnothing = 75\text{mm}$ , $h = 100\text{mm}$	350-8636	350-8636	350-8636	350-8636
Density kit for solids only (without glass body and hook), for 0.01mg and 0.1mg balances, container size: $\varnothing = 75\text{mm}$ , $h = 100\text{mm}$	350-8637	350-8637	350-8637	350-8637
Glass body for density determination of liquids, $V = 10\text{cm}^3$	350-7054	350-7054	350-7054	350-7054
Downholder for samples with $\rho < 1\text{g/cm}^3$	350-7194	350-7194	350-7194	350-7194
Evaporation trap for pipette calibration, for 0.01mg and 0.1mg balances	350-8633	350-8633	350-8633	350-8633
Adapter for Eppendorf evaporation trap, for 0.01mg and 0.1mg balances	350-8634	350-8634	350-8634	350-8634
Dust cover for the whole balance, set of 20 pieces	350-8676	350-8676	350-8686	350-8686

Slide-in Modules	360 EP	360 ES
PrecisaBUS converter, enables connection to almost all PrecisaBUS accessories	—	350-8664
USB host	350-8665	—
Ethernet wired	350-8666	—
Ethernet wireless	350-8667	—
Bluetooth	350-8668	—
PS/2 f & RS232 DB9 f	350-8670	—

Additional Accessories & Applications
- PrecisaBUS accessories, see Special Products on page 24/25
- SmartBox® applications, see Special Products on page 24/25
- Further accessories, see Special Products on page 24/25





# PRECISION BALANCES 0.01 g



## SERIES 360 EP



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
EP 1200C	1 200 g	0.01 g	0.01 g	10 mg	200 x 200	II / 0.1 g	1.5 s	360-9437-001
EP 2200C	2 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	360-9438-001
EP 4200C	4 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	360-9439-001
EP 6200C	6 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	360-9440-001
EP 8200C	8 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	360-9441-001
EP 6200C-FR	2 200 g - 6 200 g	0.01 g / 0.1 g	0.01 g / 0.02 g	15 mg / 0.02 g	200 x 200	II / 0.1 g	1.5 s	360-9442-001
EP 8200C-DR	3 200 g / 8 200 g	0.01 g / 0.1 g	0.01 g / 0.03 g	15 mg / 0.05 g	200 x 200	II / 0.1 g	1.5 s	360-9443-001



## SERIES 360 ES



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
ES 1200C	1 200 g	0.01 g	0.01 g	10 mg	200 x 200	II / 0.1 g	1.5 s	360-9444-001
ES 2200C	2 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	360-9445-001
ES 4200C	4 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	360-9446-001
ES 6200C	6 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	360-9447-001
ES 8200C	8 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	360-9448-001
ES 6200C-FR	2 200 g - 6 200 g	0.01 g / 0.1 g	0.01 g / 0.02 g	15 mg / 0.02 g	200 x 200	II / 0.1 g	1.5 s	360-9449-001
ES 8200C-DR	3 200 g / 8 200 g	0.01 g / 0.1 g	0.01 g / 0.03 g	15 mg / 0.05 g	200 x 200	II / 0.1 g	1.5 s	360-9450-001



## SERIES 321 LT



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
LT 320C	320 g	0.01 g	0.005 g	10 mg	200 x 200	II / 0.01 g	1.5 s	321-9470-001
LT 620C	620 g	0.01 g	0.005 g	10 mg	200 x 200	II / 0.1 g	1.5 s	321-9471-001
LT 1200C	1 200 g	0.01 g	0.01 g	10 mg	200 x 200	II / 0.1 g	1.5 s	321-9472-001
LT 2200C	2 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	321-9473-001
LT 3200C	3 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	321-9474-001
LT 4200C	4 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	321-9475-001
LT 6200C	6 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g	1.5 s	321-9476-001



## SERIES 321 LX



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
LX 620C	620 g	0.01 g	0.005 g	10 mg	200 x 200	II / 0.1 g*	1.5 s	321-9452-002
LX 1200C	1 200 g	0.01 g	0.01 g	10 mg	200 x 200	II / 0.1 g*	1.5 s	321-9453-002
LX 2200C	2 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g*	1.5 s	321-9454-002
LX 4200C	4 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g*	1.5 s	321-9455-002
LX 6200C	6 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g*	1.5 s	321-9457-002

\*Prepared for verification or initially verified with SCS (-001) only



## SERIES 321 LS



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
LS 320C	320 g	0.01 g	0.005 g	10 mg	200 x 200	II / 0.01 g*	1.5 s	321-9466-002
LS 620C	620 g	0.01 g	0.005 g	10 mg	200 x 200	II / 0.1 g*	1.5 s	321-9459-002
LS 1200C	1 200 g	0.01 g	0.01 g	10 mg	200 x 200	II / 0.1 g*	1.5 s	321-9460-002
LS 2200C	2 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g*	1.5 s	321-9461-002
LS 3200C	3 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g*	1.5 s	321-9462-002
LS 4200C	4 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g*	1.5 s	321-9463-002
LS 6200C	6 200 g	0.01 g	0.01 g	15 mg	200 x 200	II / 0.1 g*	1.5 s	321-9464-002

\*Prepared for verification or initially verified with SCS (-001) only



# PRECISION BALANCES 0.001 – 1 g



EP: excellently readable bright, high-resolution graphic display



ES: easy to read display with sealed keypad resistant to chemicals



RS232 and USB interfaces are standard - wireless, Bluetooth, USB host etc are optional



Bubble level located at the front; provides easier adjustment

Options	360 EP	360 ES	321 LX	321 LT/LS
Prepared for verification according to EC/OIML by Precisa (not verified!), available for balances with EC/OIML type approval and SCS only	350-8671	350-8671	350-8684	350-8684
Initially verified according to 2009/23/ECC by Precisa, available for balances with EC/OIML type approval and SCS only	350-8679	350-8679	350-8585	350-8585
SCS (self calibration system) with clock, automatic on temperature change and real-time programmable	standard	standard	321-xxxx-001	LT: standard LS: 321-xxxx-001
IP65 (protection against ingress of dust and low pressure water jets), fitted at factory, for 0.01g, 0.1g and 1g balances only (others on request)	350-8694	350-8694	350-8695	350-8695

Accessories	360 EP	360 ES	321 LX	321 LT/LS
Draft shield 320 XB, height 260mm	350-8519	350-8519	350-8519	standard
Draft shield easy (glass with cover)	320-8504	320-8504	320-8504	320-8504
Pedal for tare or print function	—	—	350-8814	350-8814
Hook for weighing below the balance	350-8527	350-8527	350-8527	350-8527
Cable for balance 360 or 321 used as reference balance	350-8661	350-8661	350-8661	350-8661
Desk power adapter with EU plug, 80V - 240V, for balances with IP65 (protection against ingress of dust and low pressure water jets)	350-8372	350-8372	350-8372	350-8372
Glass body for density determination of liquids, V = 10cm <sup>3</sup>	350-7054	350-7054	350-7054	350-7054
Animal weighing bowl complete, for 0.01g, 0.1g and 1g balances	350-8551	350-8551	350-8551	350-8551
Dust cover for the whole balance, set of 20 pieces	350-8663	350-8663	350-8686	350-8686

Slide-in Modules	360 EP	360 ES
PrecisaBUS converter, enables connection to almost all PrecisaBUS accessories	—	350-8664
USB host	350-8665	—
Ethernet wired	350-8666	—
Ethernet wireless	350-8667	—
Bluetooth	350-8668	—
PS/2 f & RS232 DB9 f	350-8670	—

Additional Accessories & Applications
- PrecisaBUS accessories, see Special Products on page 24/25
- SmartBox <sup>®</sup> applications, see Special Products on page 24/25
- Further accessories, see Special Products on page 24/25

# ANALYTICAL BALANCES 0.1 mg PRECISION BALANCES 0.001 – 0.1 g




## SERIES 320 XB<sup>BB</sup>



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
XB <sup>BB</sup> 120A	120 g	0.1 mg	0.1 mg	0.2 mg	Ø 80	—	4 s	320-9203X-003
XB <sup>BB</sup> 220A	220 g	0.1 mg	0.1 mg	0.2 mg	Ø 80	—	4 s	320-9204X-003




## SERIES 320 XB<sup>BB</sup>



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
XB <sup>BB</sup> 320M	320 g	1 mg	1 mg	1.5 mg	135 x 135	—	3 s	320-9307X-003
XB <sup>BB</sup> 620M	620 g	1 mg	1 mg	1.5 mg	135 x 135	—	3 s	320-9308X-003




## SERIES 320 XB<sup>BB</sup>



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
XB <sup>BB</sup> 2200C	2 200 g	0.01 g	0.01 g	15 mg	170 x 170	—	2 s	320-9409X-003
XB <sup>BB</sup> 3200C	3 200 g	0.01 g	0.01 g	15 mg	170 x 170	—	3 s	320-9412X-003
XB <sup>BB</sup> 4200C	4 200 g	0.01 g	0.01 g	15 mg	170 x 170	—	3 s	320-9410X-003
XB <sup>BB</sup> 6200C	6 200 g	0.01 g	0.01 g	15 mg	170 x 170	—	3 s	320-9413X-003



## SERIES 320 XB<sup>BB</sup>



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
XB <sup>BB</sup> 3200D	3 200 g	0.1 g	0.05 g	0.1 g	200 x 200	—	2 s	320-9506X-003
XB <sup>BB</sup> 6200D	6 200 g	0.1 g	0.05 g	0.1 g	200 x 200	—	2 s	320-9507X-003

# ANALYTICAL BALANCES 0.1 mg PRECISION BALANCES 0.001 – 0.1 g



320 XB: Well-trieed all-round basic draft shield



Accessories	320 XB <sup>BB</sup>
Draft shield 320 XB, height 260mm for 0.1mg balances	standard
Draft shield 320 XB, height 260mm	350-8519
Draft shield easy (glass with cover)	320-8504
Animal weighing bowl complete, for 0.01g balances	350-8550
Animal weighing bowl complete, for 0.1g and 1g balances	350-8551
Hook for weighing below the balance	350-8527
Cable for balance 320 used as reference balance	350-8534
Desk power adapter with EU plug, 80V - 240V, for balances with IP65 (protection against ingress of dust and low pressure water jets)	350-8372
Density kit, for 0.01mg and 0.1mg balances, container size: Ø = 75mm, h = 100mm	350-8636
Density kit for solids only (without glass body and hook), for 0.01mg and 0.1mg balances, container size: Ø = 75mm, h = 100mm	350-8637
Glass body for density determination of liquids, V = 10 cm <sup>3</sup>	350-7054
Downholder for samples with $\rho < 1\text{g/cm}^3$	350-7194
Evaporation trap for pipette calibration, for 0.01mg and 0.1mg balances	350-8633
Adapter for Eppendorf evaporation trap, for 0.01mg and 0.1mg balances	350-8634
Dust cover for the whole balance, set of 20 pieces	350-8589
Dust cover over display and keyboard, set of 20 pieces	350-8590
Protective hood for balance without draft shield	350-4097
Protective hood for balance with draft shield	350-4107

## Additional Accessories & Applications

- PrecisaBUS accessories, see Special Products on page 24/25
- SmartBox<sup>®</sup> applications, see Special Products on page 24/25
- Further accessories, see Special Products on page 24/25

# STANDARD BALANCES 0.001 – 1 g

## SERIES 165 BJ



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
BJ 100M	102 g	1 mg	1 mg	2 mg	Ø 100	—	4 s	165-9327-050
BJ 410C	410 g	0.01 g	0.01 g	0.02 g	135 x 135	—	2 s	165-9422-050
BJ 610C	610 g	0.01 g	0.01 g	0.02 g	135 x 135	II / 0.1 g	2 s	165-9423-050
BJ 1000C	1 020 g	0.01 g	0.01 g	0.02 g	135 x 135	—	4 s	165-9425-050
BJ 1200C	1 200 g	0.01 g	0.01 g	0.02 g	135 x 135	—	4 s	165-9436-050
BJ 2200C	2 200 g	0.01 g	0.01 g	0.02 g	135 x 135	—	4 s	165-9451-050
BJ 2100D	2 100 g	0.1 g	0.1 g	0.2 g	170 x 140	—	2 s	165-9513-050
BJ 4100D	4 100 g	0.1 g	0.1 g	0.2 g	170 x 140	—	2 s	165-9514-050
BJ 6100D	6 100 g	0.1 g	0.1 g	0.2 g	170 x 140	—	2 s	165-9515-050
BJ 8100D	8 100 g	0.1 g	0.1 g	0.2 g	170 x 140	—	4 s	165-9518-050
BJ 6100G	6 100 g	1 g	1 g	2 g	170 x 140	—	2 s	165-9603-050
BJ 12100G	12 100 g	1 g	1 g	2 g	170 x 140	—	2 s	165-9604-050





165 BJ: Easy-access draft shield

Options	165 BJ
Prepared for verification according to EC/OIML by Precisa (not verified!), available for balances with EC/OIML type approval and SCS only	350-8591
Density application	350-8632
Battery operation with 9V alkaline battery	standard

Accessories	165 BJ
Hook for weighing below the balance	350-8561
Cable for balance 165 used as reference balance	350-8534
Dust cover for the whole balance, set of 20 pieces	350-8598

## SERIES 260 BC



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
BC 220M	220 g	1 mg	1 mg	1 mg	Ø 118	II / 0.01 g	4 s	260-9343-001
BC 220M IC*	220 g	1 mg	1 mg	1 mg	Ø 118	II / 0.01 g	4 s	260-9343-002
BC 3200C	3200 g	0.01 g	0.01 g	0.01 g	180 x 160	II / 0.1 g	4 s	260-9467-001
BC 3200C IC*	3200 g	0.01 g	0.01 g	0.01 g	180 x 160	II / 0.1 g	4 s	260-9467-002

\*Internal calibration

Options	260 BC
Prepared for verification according to EC/OIML by Precisa (not verified!), available for balances with EC/OIML type approval and SCS only	350-8921
Initially verified according to 2009/23/ECC by Precisa, available for balances with EC/OIML type approval and SCS only	350-8922
Hook for weighing below the balance 220M and Carat type balances	350-8925
Hook for weighing below the balance 3200C type balances	350-8926

Further Accessories
- Further accessories, see Special Products on page 24/25

# WEIGHING MODULES

## SERIES 420 IM

High precision weigh modules, tailored for integrated weighing solutions for industrial applications. Easy to interface and to service. The weighing module is based on the appreciated technology of the Precisa series 360. With the stainless steel housing and the IP65 protection, the series 420 IM is the ideal solution for automated weighing processes.



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Response Time	Item No.
IM 220A	220 g	0.1 mg	0.1 mg	0.2 mg	Ø 52	1.6 s	420-9255-001
IM 420A	420 g	0.1 mg	0.15 g	0.4 mg	Ø 52	1.8 s	420-9256-001
IM 1220M	1 220 g	1 mg	1 mg	2 mg	Ø 80	1.6 s	420-9378-001
IM 6200C	6 200 g	0.01 g	0.01 g	15 mg	Ø 80	1.6 s	420-9477-001

### Specifications

Power supply	10 - 26 V
Power consumption	6 W
Electrical connection	RS232: 12-pin Service terminal: 8-pin
Interface	RS232: bidirectional RS422: bidirectional
Data rate	25 values/s
Protection type	IP42: 1 mg and 0.1 mg models IP65: 0.01 g models
Material housing	Stainless steel
Protocols	Precisa command set (further types on request)
Connection cable	Binder Series 423, 12-pin, open leads, 2 m

### Features

Very short response times
Various filter profiles for individual customizing to particular ambient conditions and applications
Integrated torsion protection (not for SM/A models)
High quality and robust stainless steel housing
Weighing pan with prepared tapped holes for an easy fitting of individual weighing pans
Integrated overload protection


### Typical Applications

Automated weighing processes
Weighing in heavily contaminated environment

# MOISTURE ANALYZERS



## SERIES 365 EM




ready for gypsum analysis

Model	Capacity	Readability	Repeatability		Linearity	Temperature Range	Pan Size (mm)	Response Time
EM 120-HR	124 g	0.1 mg / 0.001%	1 g / 0.1%	10 g / 0.01 %	0.2 mg	30 - 230 °C	Ø 100	4 s



## SERIES 330 XM<sup>BB</sup>



Model	Capacity	Readability	Repeatability		Linearity	Temperature Range	Pan Size (mm)	Response Time
XM <sup>BB</sup> 60-HR	124 g	0.1 mg / 0.001%	1 g / 0.1%	10 g / 0.01 %	0.2 mg	30 - 230 °C	Ø 100	4 s
XM <sup>BB</sup> 60	124 g	1 mg / 0.01 %	1 g / 0.2%	10 g / 0.02 %	1.5 mg	30 - 230 °C	Ø 100	3 s
XM <sup>BB</sup> 66	310 g	1 mg / 0.01 %	1 g / 0.2%	10 g / 0.02 %	1.5 mg	30 - 230 °C	Ø 100	3 s



## SERIES 330 XM



Model	Capacity	Readability	Repeatability		Linearity	Temperature Range	Pan Size (mm)	Response Time
XM 50	52 g	1 mg / 0.01 %	1 g / 0.5 %	10 g / 0.05%	3.0 mg	30 - 170 °C	Ø 100	4 s

Article Numbers*	EM 120-HR	XM 60 <sup>BB</sup> -HR	XM 60 <sup>BB</sup>	XM 66 <sup>BB</sup>	XM 50
Halogen radiator, 230 V	365-9245-001	330-9243B-001	330-9324B-001	330-9329B-001	335-9360-001
Halogen radiator, 115 V	365-9245-002	330-9243B-002	330-9324B-002	330-9329B-002	335-9360-002
Infrared radiator, 230 V	365-9245-003	330-9243B-003	330-9324B-003	330-9329B-003	335-9360-003
Infrared radiator, 115 V	365-9245-004	330-9243B-004	330-9324B-004	330-9329B-004	335-9360-004
Infrared dark radiator, 230 V	365-9245-007	330-9243B-007	330-9324B-007	330-9329B-007	335-9360-007
Infrared dark radiator, 115 V	365-9245-008	330-9243B-008	330-9324B-008	330-9329B-008	335-9360-008

\* The article numbers include the moisture analyzer with the corresponding heating source

# MOISTURE ANALYZERS



Various heating sources:  
halogen, quartz infrared or dark  
infrared

Accessories	EM 120-HR	XM 60 <sup>9B</sup> -HR	XM 60 <sup>9B</sup>	XM 66 <sup>9B</sup>	XM 50
Aluminum sample dishes, Ø 100mm, set of 80 pieces	350-2032	350-2032	350-2032	350-2032	350-2032
Fiberglass filters, Ø 90mm, set of 80 pieces	350-4130	350-4130	350-4130	350-4130	350-4130
Temperature sensor plate, sensor type K	350-8580	350-8580	350-8580	350-8580	350-8580
Temperature calibration kit, sensor type K, with certificate	350-8585	350-8585	350-8585	350-8585	350-8585
Temperature calibration kit, sensor type K, without certificate	350-8584	350-8584	350-8584	350-8584	350-8584
Stainless steel sample dish, reusable, Ø 100mm, 1 piece	330-2018	330-2018	330-2018	330-2018	330-2018
Calibration weight, 50g, E2	350-8241	350-8241	350-8241	350-8241	350-8241
Dust cover over display and keyboard, set of 20 pieces	—	350-8590	350-8590	350-8590	350-8590
Dust filter	350-8687	350-8687	350-8687	350-8687	350-8687



Graphic display for easy user  
guidance and real time results

## Additional Accessories

- PrecisaBUS accessories, see Special Products on page 24/25
- Further accessories, see Special Products on page 24/25

## Slide-in Modules

Slide-in Modules	EM 120-HR
USB host	350-8665
Ethernet wired	350-8666
Ethernet wireless	350-8667
Bluetooth	350-8668
PS 2 f & RS 232 DB9 f	350-8670

# AUTOMATIC MOISTURE & ASH ANALYZERS



## SERIES 340



Model	Capacity	Readability	Repeatability		Temp. Range	Crucibles	Response Time	Item No.
prepASH 229	120 g	0.1 mg / 0.01 ‰	1 g / 0.2 ‰	10 g / 0.02 ‰	50 - 1 000 °C	29 pcs. / 35 ml	4 s	340-9220-002
prepASH 219	120 g	0.1 mg / 0.01 ‰	1 g / 0.2 ‰	10 g / 0.02 ‰	50 - 1 000 °C	19 pcs. / 35 ml	4 s	340-9221-002
prepASH 212	120 g	0.1 mg / 0.01 ‰	1 g / 0.2 ‰	10 g / 0.02 ‰	50 - 1 000 °C	12 pcs. / 40 ml	4 s	340-9222-002



prepSTATION  
Turntable and crucibles are not included in the prepSTATION standard delivery

Options	prepASH 229	prepASH 219	prepASH 212	Recommendations		
				Standard Applications	Sulphuric Acid Applications	Volatiles Determination (Coal, Coke)
3 inputs gas flow control unit for N <sub>2</sub> , O <sub>2</sub> and air	340-8502	340-8502	340-8502	yes	yes	essential
prepSTATION includes: - prepSTATION unit - EP 120A analytical balance - Data cable RJ45, l = 0.7m for the connection between prepSTATION and balance	340-9010	340-9010	340-9010	yes	yes	no
Scrubber K-415 (condensation-neutralization-adsorption unit) for e.g. determination of sulfated ash	340-9001	340-9001	340-9001	optional	essential	no
Connection set for ccrubber	340-9002	340-9002	340-9002	yes	essential	no
ECD (enhanced cooling device)	340-8504	340-8504	340-8504	yes	yes	yes
ECD (enhanced cooling device) as retrofit kit	340-8697	340-8697	340-8697	yes	yes	yes

## Further Accessories

- Further accessories, see Special Products on page 24/25



Scrubber K-415 (condensation-neutralization-adsorption unit)

# AUTOMATIC MOISTURE & ASH ANALYZERS



Turntable for 29 samples



Turntable for 19 samples




Turntable for 12 large crucibles

Accessories	prepASH 229	prepASH 219	prepASH 212	Recommendations		
				Standard Applications	Sulphuric Acid Applications	Volatiles Determination (Coal, Coke)
Turntable for	340-8012	340-8012	340-8012	yes	recommended	yes
Crucible tweezers	PN 3950-099	PN 3950-099	PN 3950-099	standard	standard	—
Crucible tweezers for crucible lid handling	340-7090	340-7090	340-7090	—	—	standard
Turntable for 29/19 samples, SiC, for prepASH 229 and prepASH 219	standard	standard	—	standard 229/219	standard 229/219	standard 229/219
Turntable for 12 samples, SiC, for prepASH 229, 219 and 212	340-4072	340-4072	standard	standard 212	standard 212	no
Crucible, silicate ceramic, set of 5 pieces, use with turntable 29/19	340-8030	340-8030	340-8030	standard 229, 219	standard 229, 219	no
Crucible, Al <sub>2</sub> O <sub>3</sub> , set of 5 pieces, use with turntable 29/19	340-8031	340-8031	340-8031	yes	yes	no
Crucible for use with lid Al <sub>2</sub> O <sub>3</sub> , set of 5 pieces, use with turntable 29/19 and crucible lid 340-8033	340-8032	340-8032	340-8032	yes	yes	standard 229/219
Crucible lid, Al <sub>2</sub> O <sub>3</sub> , set of 5 pieces, use with turn-table 29/19 and crucible 340-8032	340-8033	340-8033	340-8033	yes	yes	standard 229/219
Standard crucible, silicate ceramic, set of 5 pieces, use only with turn-table 12 and adapter 340-8035	340-8034	340-8034	standard	standard 212	standard 212	no
Crucible 50ml, Al <sub>2</sub> O <sub>3</sub> , set of 5 pieces, use only with turn-table 12 and adapter 340-8035	340-8036	340-8036	340-8036	yes	yes	no
Adapter for standard crucible, silicate ceramic, set of 5 pieces use only with turn-table 12 and standard crucible 340-8034 or other crucible available from the market	340-8035	340-8035	standard	standard 212	standard 212	yes

# INDUSTRIAL SCALES



## SERIES 490 IBK/ITK/ISK



Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.**
IBK 12000D	12 100 g	0.1 g	0.1 g	0.2 g	400 x 300	II / 1 g	2 s	490-9528-001
IBK 18000D	18 100 g	0.1 g	0.1 g	0.2 g	400 x 300	II / 1 g	2 s	490-9529-001
IBK 24000D	24 100 g	0.1 g	0.1 g	0.2 g	400 x 300	II / 1 g	2 s	490-9530-001
IBK 34000D	34 100 g*	0.1 g	0.1 g	0.2 g	400 x 300	II / 1 g	2 s	490-9531-001
IBK 34000D-DR	12 100 / 34 100 g*	0.1 g / 1 g	0.1 g	0.2 g	400 x 300	II / 1 g	2 s	490-9805-001
IBK 34000D-FR	12 100 - 34 100 g*	0.1 g / 1 g	0.1 g	0.2 g	400 x 300	II / 1 g	2 s	490-9532-001
IBK 20000G	20 100 g	1 g	0.5 g	1 g	400 x 300	II / 1 g	2 s	490-9606-001
IBK 30000G	30 100 g	1 g	0.5 g	1 g	400 x 300	II / 1 g	2 s	490-9607-001
IBK 40000G	40 100 g	1 g	0.5 g	1 g	400 x 300	II / 2 g	2 s	490-9608-001
IBK 60000G	60 100 g	1 g	1 g	1.5 g	400 x 300	II / 10 g	2 s	490-9609-001

\*approved up to max. 30 100 g

\*\*490-xxxx-002 / ITK: + CHF 300  
490-xxxx-003 / ISK Count: + CHF 710  
490-xxxx-004 / ISK FPVO: + CHF 710

Terminal IBK included  
Protection platform IP54 (IP65 optional)



IBK: User-friendly multi-application terminal

### TERMINAL IBK




Options	490
Prepared for verification according to EC/OIML by Precisa (not verified!), available for balances with EC/OIML type approval and SCS only	350-8577
Initially verified according to 2009/23/ECC by Precisa, available for balances with EC/OIML type approval and SCS only	350-8578
Protection IP65: protection against ingress of dust and low pressure water jets, fitted at factory	350-8646



ITK: Terminal with alphanumeric input and manual tare entry

### TERMINAL ITK




Accessories	490
Wall bracket for terminal	350-8654
Post for rear mounted terminal	350-8655
Connection cable from terminal to platform, length 3m	350-8586-030
Connection cable from terminal to platform, length 5.5m	350-8586-055
Connection cable from terminal to platform, length 10m	350-8586-100
Below the balance weighing feature, up to 40kg	350-8630
Below the balance weighing feature, IP65 version, up to 40kg	350-8635
Dust cover for terminal, set of 20 pieces	350-8599



ISK: Terminal with embedded SmartBox®; available with applications Piece Counting or FPVO (finished goods packing control)

### TERMINAL ISK



Additional Accessories & Applications
- PrecisaBUS accessories, see Special Products on page 24/25
- SmartBox® applications, see Special Products on page 24/25
- Further accessories, see Special Products on page 24/25

# INDUSTRIAL SCALES



## SERIES 410 SRS STEEL PAINTED IP65

(depending on terminal SRD/SRM)

Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“ <sup>tr</sup>	Response Time	Item No.
SRS 75K	75 kg	5 g	5 g	5 g	500 x 400	III / 50 g	2 s	410-9900-001
SRS 150K	150 kg	10 g	10 g	10 g	500 x 400	III / 50 g	2 s	410-9901-001
SRS 300K	300 kg	20 g	20 g	40 g	500 x 400	III / 100 g	2 s	410-9902-001

Protection IP 65

\* technical data in connection with terminal SRD or SRM



## SERIES 410 SRC STAINLESS STEEL IP67

(depending on terminal SRD/SRM)

Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“ <sup>tr</sup>	Response Time	Item No.
SRC 75K	75 kg	5 g	5 g	5 g	500 x 380	III / 50 g	2 s	410-9910-001
SRC 150K	150 kg	10 g	10 g	10 g	500 x 380	III / 50 g	2 s	410-9911-001

Protection IP 67

\* technical data in connection with terminal SRD or SRM



SRD: Easy-to-read backlit LCD  
ABS: Basic terminal

## TERMINAL SRD

Model	Type Approval	Dimensions WxLxH (mm)	Net Weight	Protection	Response Time	Item No.
SRD ABS	EC/OIML, III	240 x 160 x 120	1.6 kg	IP42	2 s	410-9922-001
SRD SST	none	280 x 190 x 180	3 kg	IP67	2 s	410-9923-001



SRM: Display with keypad for numeric input  
SST: Stainless steel terminal

## TERMINAL SRM

Model	Type Approval	Dimensions WxLxH (mm)	Net Weight	Protection	Response Time	Item No.
SRM ABS	EC/OIML, III	240 x 160 x 120	1.6 kg	IP42	2 s	410-9920-001
SRM SST	none	280 x 190 x 180	3 kg	IP67	2 s	410-9921-001

### Options

Prepared for verification according to EC/OIML by Precisa (not verified!), available for balances with EC/OIML type approval and SCS only

410

350-8680

### Accessories

	SRD ABS	SRM ABS	SRD SST	SRM SST
Wall bracket for terminal	350-8626	350-8626	—	—
Post for rear mounted terminal to platform SRS	350-8627	350-8627	—	—
Post for rear mounted terminal to platform SRC	—	—	350-8629	350-8629

# SPECIAL PRODUCTS



## SERIES 321 LS CARAT

Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
LS 600M-C	600 ct / 120 g	0.001 ct / 0.001 g	0.001 ct / 0.001 g	0.001 ct / 0.001 g	Ø 90	I / 0.01 ct	2 s	321-9371-002
LS 1100M-C	1100 ct / 220 g	0.001 ct / 0.001 g	0.001 ct / 0.001 g	0.001 ct / 0.001 g	Ø 90	I / 0.01 ct	2 s	321-9372-002
LS 3100C-C	3100 ct / 620 g	0.01 ct / 0.01 g	0.01 ct / 0.005 g	0.01 ct / 0.01 g	135 x 135	II / 0.1 ct	1.5 s	321-9469-002

\*Prepared for verification or initially verified with SCS (-001) only, see column 321 LS in table Options on page 11 (IP65 protection not available)



## SERIES 260 BC CARAT

Model	Capacity	Readability	Repeatability	Linearity	Pan Size (mm)	Class / „e“	Response Time	Item No.
BC 600M-C	600 ct / 120 g	0.001 ct / 0.001 g	0.001 ct / 0.001 g	0.003 ct / 0.001 g	Ø 80	I / 0.01 ct	4 s	260-9359-001
BC 1600C-C	1600 ct / 320 g	0.01 ct / 0.01 g	0.01 ct / 0.01 g	0.03 ct / 0.01 g	Ø 80	I / 0.1 ct	4 s	260-9468-001



## DC IONIZERS

### Stat-FAN

Power supply	Neutralization	Power	Airflow	Temp. Range	Item No.
230 V AC, 115 V AC or 18 V AC by an adapter (x: 1=EU, 2=UK, 3=AUS, 4=USA)	< +/- 20 V	2 W	max. 225 l/min.	0-40° C	350-8682-00x



### Stat-PEN

Power supply	Neutralization	Power	Temp. Range	IP Class	Item No.
> 100 V AC 50-60 Hz (x: 1=EU, 2=UK, 3=AUS, 4=USA)	+/- 30 V	0.1 W	- 20+40° C	IP60	350-8683-00x


# SPECIAL PRODUCTS



Calibration Weights				
Nominal Value	Class	Accuracy	Item No. without Certificate	Item No. with Certificate
50 g	E2	0.15 mg	350-8200	350-8260
100 g	E2	0.15 mg	350-8201	350-8261
200 g	E2	0.3 mg	350-8202	350-8262
500 g	E2	0.75 mg	350-8203	350-8263
100 g	F1	0.5 mg	350-8243	350-8264
200 g	F1	1.0 mg	350-8244	350-8265
500 g	F1	2.5 mg	350-8245	350-8266
1 000 g	F1	5.0 mg	350-8246	350-8267
100 g	F2	1.5 mg	350-8247	350-8268
200 g	F2	3 mg	350-8248	350-8269
500 g	F2	7.5 mg	350-8249	350-8270
1 000 g	F2	15 mg	350-8250	350-8271
2 000 g	F2	30 mg	350-8251	350-8272
5 000 g	F2	75 mg	350-8252	350-8273
2 000 g	M1	0.1 g	350-8253	350-8274
5 000 g	M1	0.25 g	350-8254	350-8275
10 000 g	M1	0.5 g	350-8255	350-8276
1 mg - 500 g	F1		350-8257	
1 mg - 1 000 g	F1		350-8256	
1 mg - 500 g	F2		350-8258	
1 mg - 1 000 g	F2		350-8259	

number of scale intervals = capacity / readability  
 (e.g. 3 200C =>  $d = 3\,200\text{g} / 0.01\text{g} = 320\,000$ )

scale interval on non-approved balances = d  
 scale interval on approved balances = e

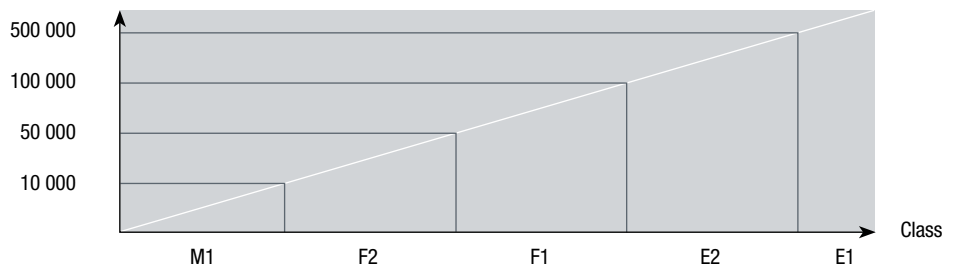

# SPECIAL PRODUCTS



Signal lamp



SmartBox®



Printer



Ethernet

Common Accessories	360 EP	360 ES	321 LT/LX/LS	320 XB <sup>BB</sup>
Printer CBM910 230V - with cable and paper roll	350-8379	350-8379	350-8379	350-8363
Printer CBM910 115V - with cable and paper roll	350-8380	350-8380	350-8380	350-8370
Paper roll for Printer CMB910	350-8366	350-8366	350-8366	350-8366
Ribbon for Printer CBM910	350-8367	350-8367	350-8367	350-8367
Multiplexor for up to 7 balances of the series 165/320/321/360/490 for serial (RS232) data transmission to PC or printer (at least one balance has to be of the series 320/321)	350-8513	350-8513	350-8513	350-8513
Data cable RJ45, length 0.75m	—	—	—	350-8525
Data cable RJ45, length 1.5m	—	—	—	350-8520
Data cable RJ45, length 3m	—	—	—	350-8521
Adapter RJ45 / DB9 f, (to PC)	350-8522	350-8522	350-8522	350-8522
Adapter RJ45 / DB25 m, (to printer)	350-8524	350-8524	350-8524	350-8524
Data cable RJ45 / DB9 f, length 1.5m, (to PC)	—	—	—	350-8557
Data cable RJ45 / DB25 m, length 1.5m, (to printer)	—	—	—	350-8559
Data cable DB9 m / DB9 f, length 1.5m, (to PC)	350-8672	350-8672	350-8672	—
Data cable DB9 m / DB25 m, length 1.5m, (to printer)	350-8673	350-8673	350-8673	—
Data cable DB9 f / DB9 f, length 1.5m, (to PC)	—	—	—	—
Data cable DB9 f / DB25 m, length 1.5m, (to printer)	—	—	—	—
USB cable A-B, length 1.5m	PN 3950-125	PN 3950-125	PN 3950-125	—
HID cable, RS232 / USB (x: 0=e, 1=d, 2=f)	350-8816-x00	350-8816-x00	350-8816-x00	on demand
UPS (uninterruptible power supply), external	350-8662	350-8662	350-8662	350-8662
Anti-theft device, mechanical	350-8555	350-8555	350-8555	350-8555
Pan for diamonds (carat pan)	350-8322	350-8322	350-8322	350-8322

PrecisaBUS Accessories	360 EP	360 ES	321 LT/LX/LS	320 XB <sup>BB</sup>
Remote display, freestanding, with cable, length 1.5m	—	350-8504*	350-8504	350-8504
Remote display, mounted to the balance	—	—	—	350-8505
Remote display, mounted to the wall, with cable, length 3m	—	350-8516*	350-8516	350-8516
RS232 interface for data transmission, DB25 f: - to PC, printer or bar code printer - from bar code reader (350-8856) or reference balance	—	350-8506*	350-8506	350-8506
Interface 20mA current loop passive	—	350-8526*	350-8526	350-8526
Analog output -10V... +10V (resolution 10mV)	—	350-8508*	350-8508	350-8508
Ethernet, wired	—	350-8573*	350-8573	350-8573
Ethernet, wireless	—	350-8588*	350-8588	350-8588
Signal lamp, indicator with 3 lamps; red, green and yellow	on demand	350-8510*	350-8510	350-8510
Horn for signal lamp	350-8533	350-8533*	350-8533	350-8533
Input/Output module with 6 TTL inputs and 8 relay outputs	on demand	350-8509*	350-8509	350-8509
CCE bar code scanner BCS5040, DB25 m, to be connected by meanings of the RS232 interface 350-8506	—	350-8856	350-8856	350-8856

\*needs PrecisaBUS converter, 350-8664

SmartBox® Applications	360 EP	360 ES	321 LT/LX/LS	320 XB <sup>BB</sup>
SmartBox® Counting	—	350-8511-011*	350-8511-011	350-8511-011
SmartBox® FPVO (finished goods packing control)	—	350-8511-012*	350-8511-012	350-8511-012
CCE bar code scanner BCS5040, RJ45, to be connected by meanings of channel 1 or 2 of the SmartBox®	—	350-8531	350-8531	350-8531

\*needs PrecisaBUS converter, 350-8664



## SPECIAL PRODUCTS

165 BJ	260 BC	490 IBK/ITK/ISK	Terminal SRD/SRM	330 XM	EM 120-HR
350-8363	on demand	350-8363	350-8381	350-8363	350-8379
350-8370	on demand	350-8370	350-8382	350-8370	350-8380
350-8366	on demand	350-8366	350-8366	350-8366	350-8366
350-8367	on demand	350-8367	350-8367	350-8367	350-8367
350-8513	—	350-8513	—	350-8513	350-8513
350-8525	—	350-8525	—	350-8525	—
350-8520	—	350-8520	—	350-8520	—
350-8521	—	350-8521	—	350-8521	—
350-8522	—	350-8522	350-8522	350-8522	350-8522
350-8524	—	350-8524	350-8524	350-8524	350-8524
350-8557	—	350-8557	—	350-8557	—
350-8559	—	350-8559	—	350-8559	—
—	—	—	—	—	350-8672
—	—	—	—	—	350-8673
—	—	—	350-8674	—	—
—	—	—	350-8675	—	—
—	—	—	—	—	PN 3950-125
—	—	on demand	—	—	—
350-8662	350-8662	350-8662	350-8662	350-8662	350-8662
350-8555	—	350-8555	—	350-8555	350-8555
350-8322	—	350-8322	—	—	—

165 BJ	260 BC	490 IBK/ITK/ISK	Terminal SRD/SRM	330 XM	EM 120-HR
—	—	350-8504	—	350-8504	—
—	—	—	—	—	—
—	—	350-8516	—	350-8516	—
—	—	350-8506	—	350-8506	—
—	—	350-8526	—	350-8526	—
—	—	350-8508	—	350-8508	—
—	—	350-8573	—	350-8573	—
—	—	350-8588	—	350-8588	—
—	—	350-8510	—	350-8510	—
—	—	350-8533	—	350-8533	—
—	—	350-8509	—	350-8509	—
—	—	350-8856	—	350-8856	—

165 BJ	260 BC	490 IBK/ITK/ISK	Terminal SRD/SRM	330 XM	EM 120-HR
—	—	350-8511-011	—	—	—
—	—	350-8511-012	—	—	—
—	—	350-8531	—	—	—



## THE TECHCOMP GROUP

In addition to Precisa, Techcomp Europe comprises the following companies:

### **Froilabo**

Froilabo is a specialist manufacturer of Ultra Low and high temperature equipment. In addition to a wide range of minus 85C freezers, Froilabo manufactures various specialist systems for forced air flow, blast freezing, incubation and centrifugation. The company is based in Lyon in France and products are distributed globally. The brand has an excellent reputation for reliability and performance as products have been continuously developed over many years.

### **Dynamica**

Dynamica has a range of life science and analytical products incorporating spectrophotometers, GC, plate readers/washers and centrifuges. Laboratory instruments from Dynamica are used in the fields of life sciences, chemistry, pharmaceuticals and education. Products have application and technical support from the dedicated team in Milton Keynes in the UK.



EI is an analytical instrument specialist based designing and manufacturing Fluorescence Life Time Spectrophotometers for the research market. In addition, EI also produces a wide range of Gas Sensors using NIR technology for a multitude of industrial applications.

Precisa Gravimetrics AG  
Moosmattstrasse 32,  
8953 Dietikon, Switzerland  
Tel. +41 44 744 28 28  
Fax +41 44 744 28 38  
Email: [info@precisa.ch](mailto:info@precisa.ch)  
[www.precisa.com](http://www.precisa.com)

